

**BALDOR® • RELIANCE™**

---

# Customer information packet

## L3708TM

5HP, 1725RPM, 1PH, 60HZ, 213T, 3744LC, TEFC, F1

Class - None

Division - Not Applicable

## Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	5.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
XP Class and Group	None
XP Division	Not Applicable
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	21.500 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	21.5 a
Insulation Class	F
Inverter Code	Not Inverter

## Part detail

Revision	AY
Type	AC
Mech. spec.	37E039
Base	
Status	PRD/A
Elec. spec.	37WG0679
Layout	37LYE039
Eff. date	05-10-2024
CD Diagram	CD0002A02
Poles	04
Leads	2#12 A PH,3#14 B&J
Proprietary	False
Created date	01-01-0001

<b>KVA Code</b>	J
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	No Locked Bearing
<b>Motor Lead Exit</b>	Ko Box
<b>Motor Lead Quantity/Wire Size</b>	2 @ 12 AWG, A PH
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3744LC
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	19.02 IN
<b>Power Factor</b>	87
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	Standard
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	1.375 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	1725 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	Do Not Use
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	Manual Thermal Overload
<b>Winding Thermal 1 Location</b>	KO
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP1257L</b>									
<b>CAT.NO.</b>	L3708TM								
<b>SPEC.</b>	37E39-679								
<b>HP</b>	5								
<b>VOLTS</b>	230								
<b>AMP</b>	21.5								
<b>RPM</b>	1725								
<b>FRAME</b>	213T		<b>HZ</b>	60		<b>PH</b>	1		
<b>SER.F.</b>	1.00	<b>CODE</b>	J	<b>DES</b>	L	<b>CL</b>	F		
<b>NEMA-NOM-EFF</b>	82	<b>PF</b>	87						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>									
<b>DE</b>	6307	<b>ODE</b>	6206						
<b>ENCL</b>	TEFC	<b>SN</b>							

**Accessories**

<b>Part number</b>	<b>Description</b>	<b>Multiplier</b>
37-3301	C FACE KIT	P1

**AC Induction Motor Performance Data**

Record # 61347

Typical performance - not guaranteed values

Winding: 37WG0679-R002		Type: 3744LC		Enclosure: TEFC	
<b>Nameplate Data</b>			<b>230 V, 60 Hz: Single Voltage Motor</b>		
Rated Output (HP)	5	Full Load Torque	15 LB-FT		
Volts	230	Start Configuration	direct on line		
Full Load Amps	21.5	Breakdown Torque	40 LB-FT		
R.P.M.	1725	Pull-up Torque	28 LB-FT		
Hz	60	Locked-rotor Torque	50 LB-FT		
NEMA Design Code	L	Starting Current	155 A		
Service Factor (S.F.)	1	No-load Current	6.5 A		
NEMA Nom. Eff.	82	Line-line Res. @ 25°C	0.464 Ω A Ph 2.17 Ω B Ph		
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	69°C		

**Load Characteristics 230 V, 60 Hz, 5 HP**

% of Rated Load	25	50	75	100	125	150
Power Factor	68	83	89	91	91	90
Efficiency	69.2	80	82.9	83	81.5	78.6
Speed	1787	1775	1761	1745	1727	1702
Line amperes	8.6	12.2	16.5	21.6	27.3	34.3


ABB Motors and Mechanical Inc.

WINDING # 37WG0679

Typical performance - not guaranteed values.

5 HP 1 PH 60 HZ 1725 RPM 230 V 3744LC

TORQUES (LB-FT) : PO=40 PU=28 LR=50 LRA=155

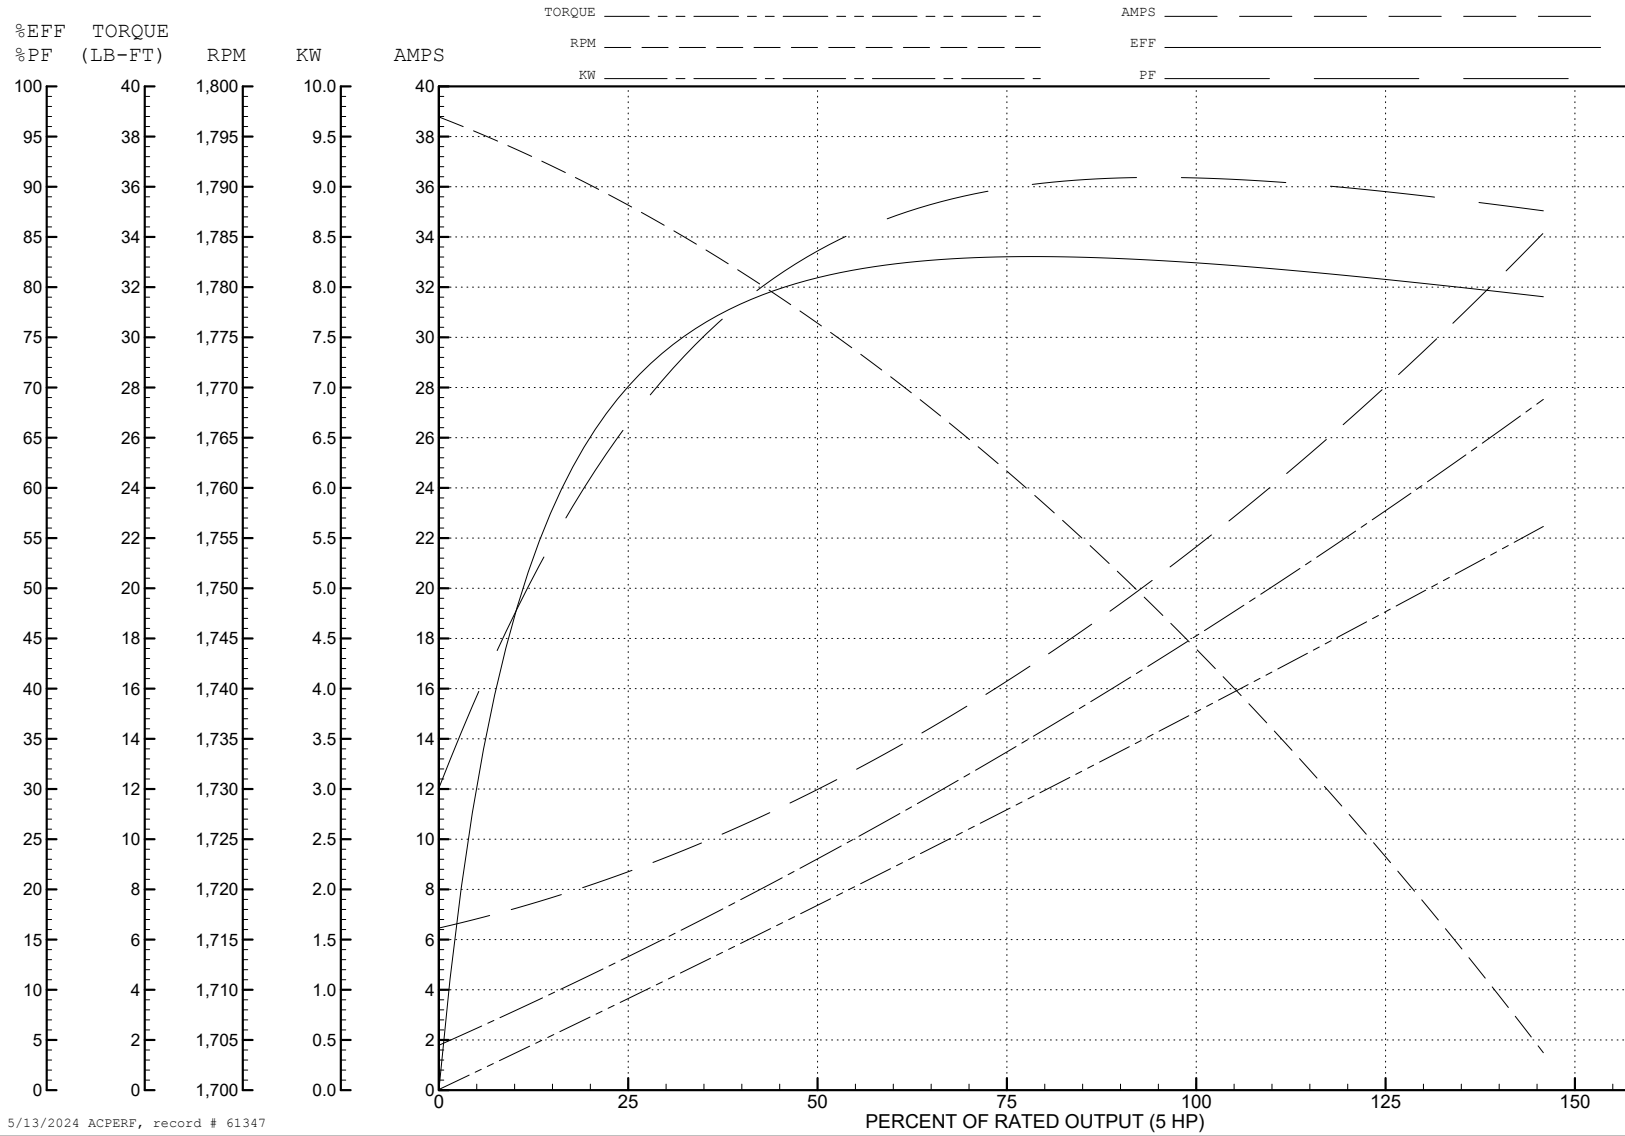


5/13/2024 ACPERF, record # 61347





CD0002A02

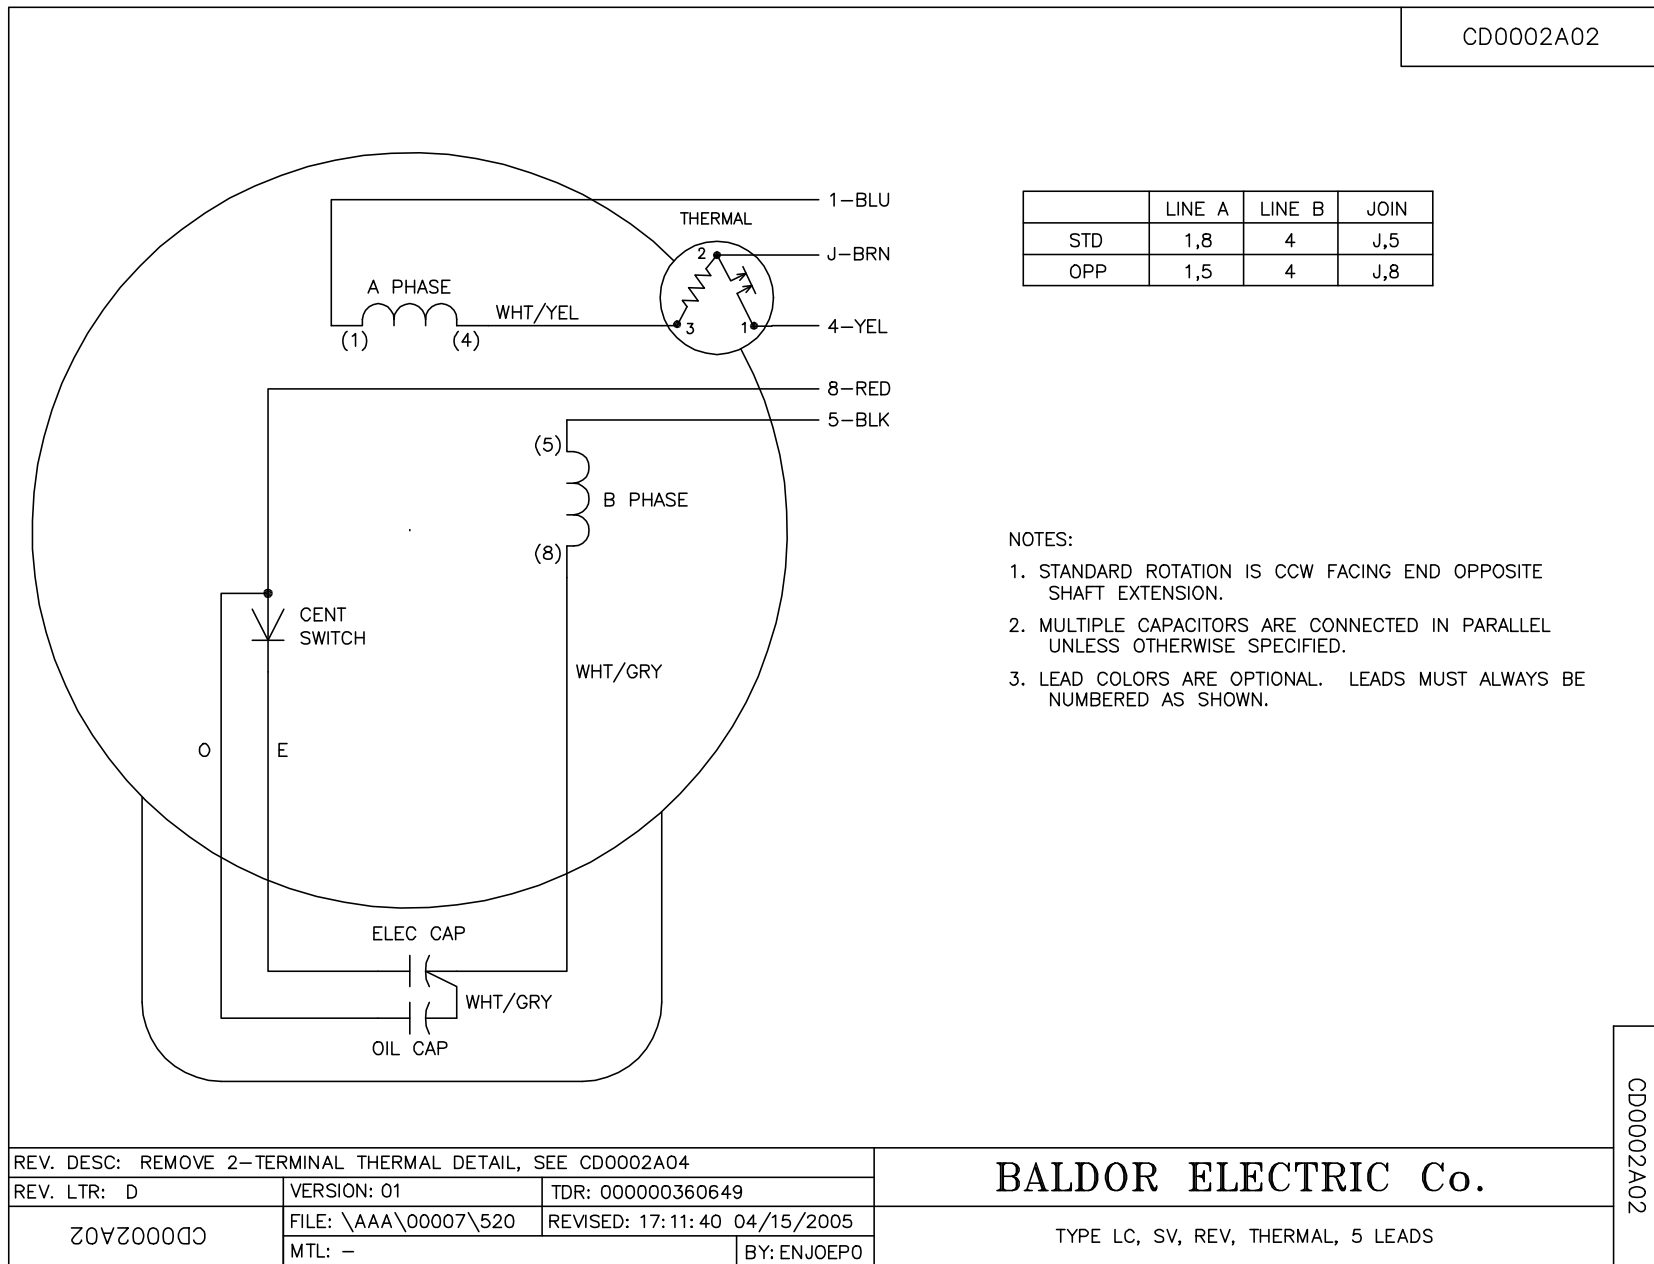

	LINE A	LINE B	JOIN
STD	1,8	4	J,5
OPP	1,5	4	J,8

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE 2-TERMINAL THERMAL DETAIL, SEE CD0002A04		
REV. LTR: D	VERSION: 01	TDR: 000000360649
CD0002A02	FILE: \AAA\00007\520	REVISED: 17:11:40 04/15/2005
	MTL: -	BY: ENJOEPO

**BALDOR ELECTRIC Co.**

TYPE LC, SV, REV, THERMAL, 5 LEADS

CD0002A02